


K LINE

Converters / Isolators 6,2 m housing

K121

Programmable Loop-Powered Universal Converter

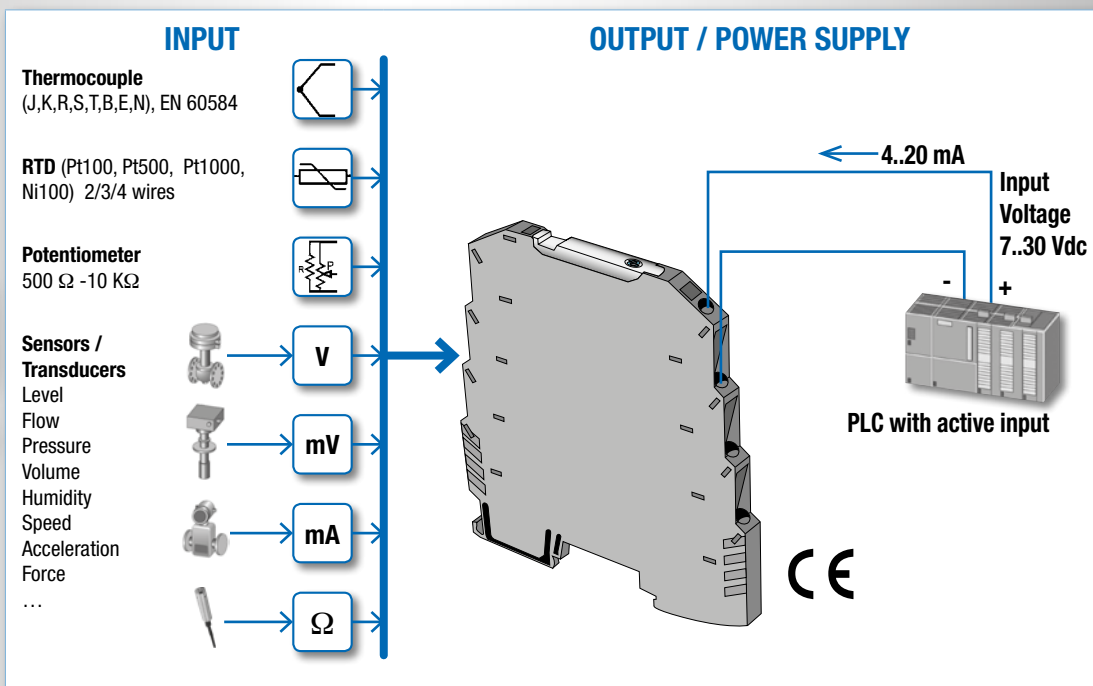

ALL-IN-ONE

**LOOP POWERED
CONVERTER**

Power supply	7..30 Vdc
Universal Input	Thermocouple (J,K,R,S,T,B,E,N) RTD (PT100-500-1000-Ni100) with 2,3,4 wire connections Voltage -150...+150mV, -30...+30V Current -24...+24mA Potentiometer 500 Ω -10 KΩ Resistance up to 1760 Ω
Output	4..20 mA (loop powered)
Galvanic isolation	1,5 kVac
Configuration	Through EASY-LP software (S117p) Via free software
Operating temperature	-20...+65 °C

For further information, please visit

www.seneca.it

SENECA



K LINE Converters / Isolators 6,2 m housing

K121

Programmable
Loop-Powered Universal
Converter



CODICI D'ORDINE

Model	K121	Programmable Loop-Powered Universal Converter
Programming Kit	S117P	Easy-LP software + USB adapter

SPECIFICHE TECNICHE

GENERAL FEATURES

Power supply	7..30 Vdc
Power consumption	< 660 mW
Channels number	1 input, 1 outputs
Galvanic isolation	1.5 kVac, 2 ways
Power supply on side terminals	Yes
Programming	Via Easy-LP program, using S117P (USB adapter)
Dimensions (wxhxd)	6.2 x 93.1 x 102,5 mm
Operating temperature	-20...+65°C
Connections	Spring clamps (EN 60175)
Approvals	CE, EN 61000-6-4, EN 64000-6-2, EN 61010-1

INPUT

Channels	1
Potentiometer	From 500Ω to 10 KΩ, Input impedance 10 MΩ
Thermocouple	Type J,K,R,S,T,B,E,N, Input impedance 10 MΩ, cold junction compensation -40 ..65 ± 1,5°C Settable, fault sensor detection settable
RTD / Resistance	Type PT100-500-1000-Ni100 with 2,3,4 wire connection, Excitation current 375 μA
Voltage (mV)	-150...+150 mV, Input impedance 10 MΩ
Voltage (V)	-30...+30 V, Input impedance 200 KΩ
Current	-24...+24 mA, Input impedance 40 Ω

TABLE OF INPUT RANGE


	Input	Range	Calibration error	EMI	Minimum Span	Resolution	Standard
Thermocouple	J	-210..1200 °C	0,1 %	< 0,5 %	50 °C	5 μV	EN 60584
	K	-200..1372 °C	0,1 %	< 0,5 %	50 °C	5 μV	EN 60584
	R	-50..1768 °C	0,1 %	< 0,5 %	100 °C	5 μV	EN 60584
	S	-50..1768 °C	0,1 %	< 0,5 %	100 °C	5 μV	EN 60584
	T	-200..400 °C	0,1 %	< 0,5 %	50 °C	5 μV	EN 60584
	B	0..1820 °C	0,1 %	< 0,5 %	100 °C	5 μV	EN 60584
	E	-200..1000 °C	0,1 %	< 0,5 %	50 °C	5 μV	EN 60584
	N	-200..1300 °C	0,1 %	< 0,5 %	50 °C	5 μV	EN 60584
	RTD	Ni100	-60..250 °C	0,1 %	< 0,5 %	20 °C	6 mΩ
Pt100		-200..650 °C	0,1 %	< 0,5 %	20 °C	6 mΩ	EN 60751
Pt500		-200..650 °C	0,1 %	< 0,5 %	20 °C	28 mΩ	
Pt1000		-200..200 °C	0,1 %	< 0,5 %	20 °C	28 mΩ	
Voltage	mV	-150..150 mV	0,1 %	< 0,5 %	2,5 mV	5 μV	
Potent.	Ω	500..10000Ω	0,1 %	< 0,5 %	10 %	0,0015 %	
Resist.	Ω	0..400 Ω	0,1 %	< 0,5 %	10 Ω	6 mΩ	
Resist.	Ω	0..1760 Ω	0,1 %	< 0,5 %	10 %	28 mΩ	
Voltage	V	-30 ..30 Vdc	0,1 %	< 0,5 %	0,5 V	~ 1 mV	
Current	mA	-24 ..24 mA	0,1 %	< 0,5 %	0,5 mA	~ 1 μA	

OUTPUT

Channels	1
Type	4..20 mA (loop powered)
Load resistance	1 KΩ @ 28 Vdc, 21 mA
Resolution	2 μA (< 13 bit)
Output in case of over-range	+ 2,5% of end scale, - 2,5% of start scale
Output in case of fault	+ 5% of end scale, - 5% of start scale

SCHEMES, PROGRAMMING

INPUT

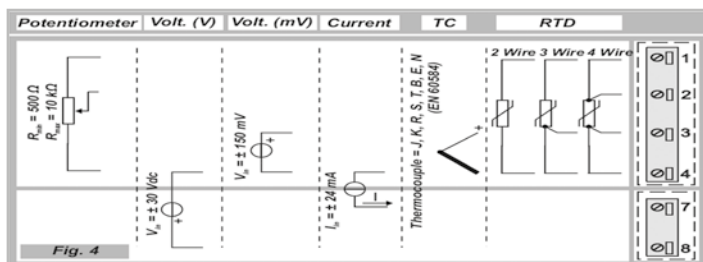

OUTPUT & POWER SUPPLY






DIAGRAM: LOAD RESISTANCE VS VOLTAGE



EASY-LP SOFTWARE SCREENSHOTS

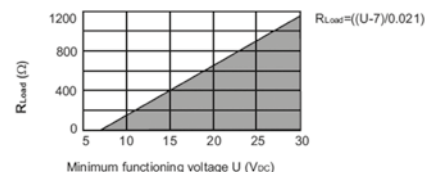

CONFIGURATION

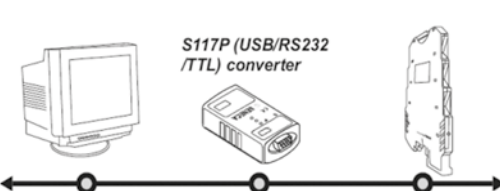

via Germania, 34 • 35127 Padova - (I) - Tel. +39 049 87.05.359 (.408)
Fax +39 049 87.06.287 • www.seneca.it • info@seneca.it

K121_1003_EN - Document subject to modifications and revisions. Reproduction forbidden if not authorized.